

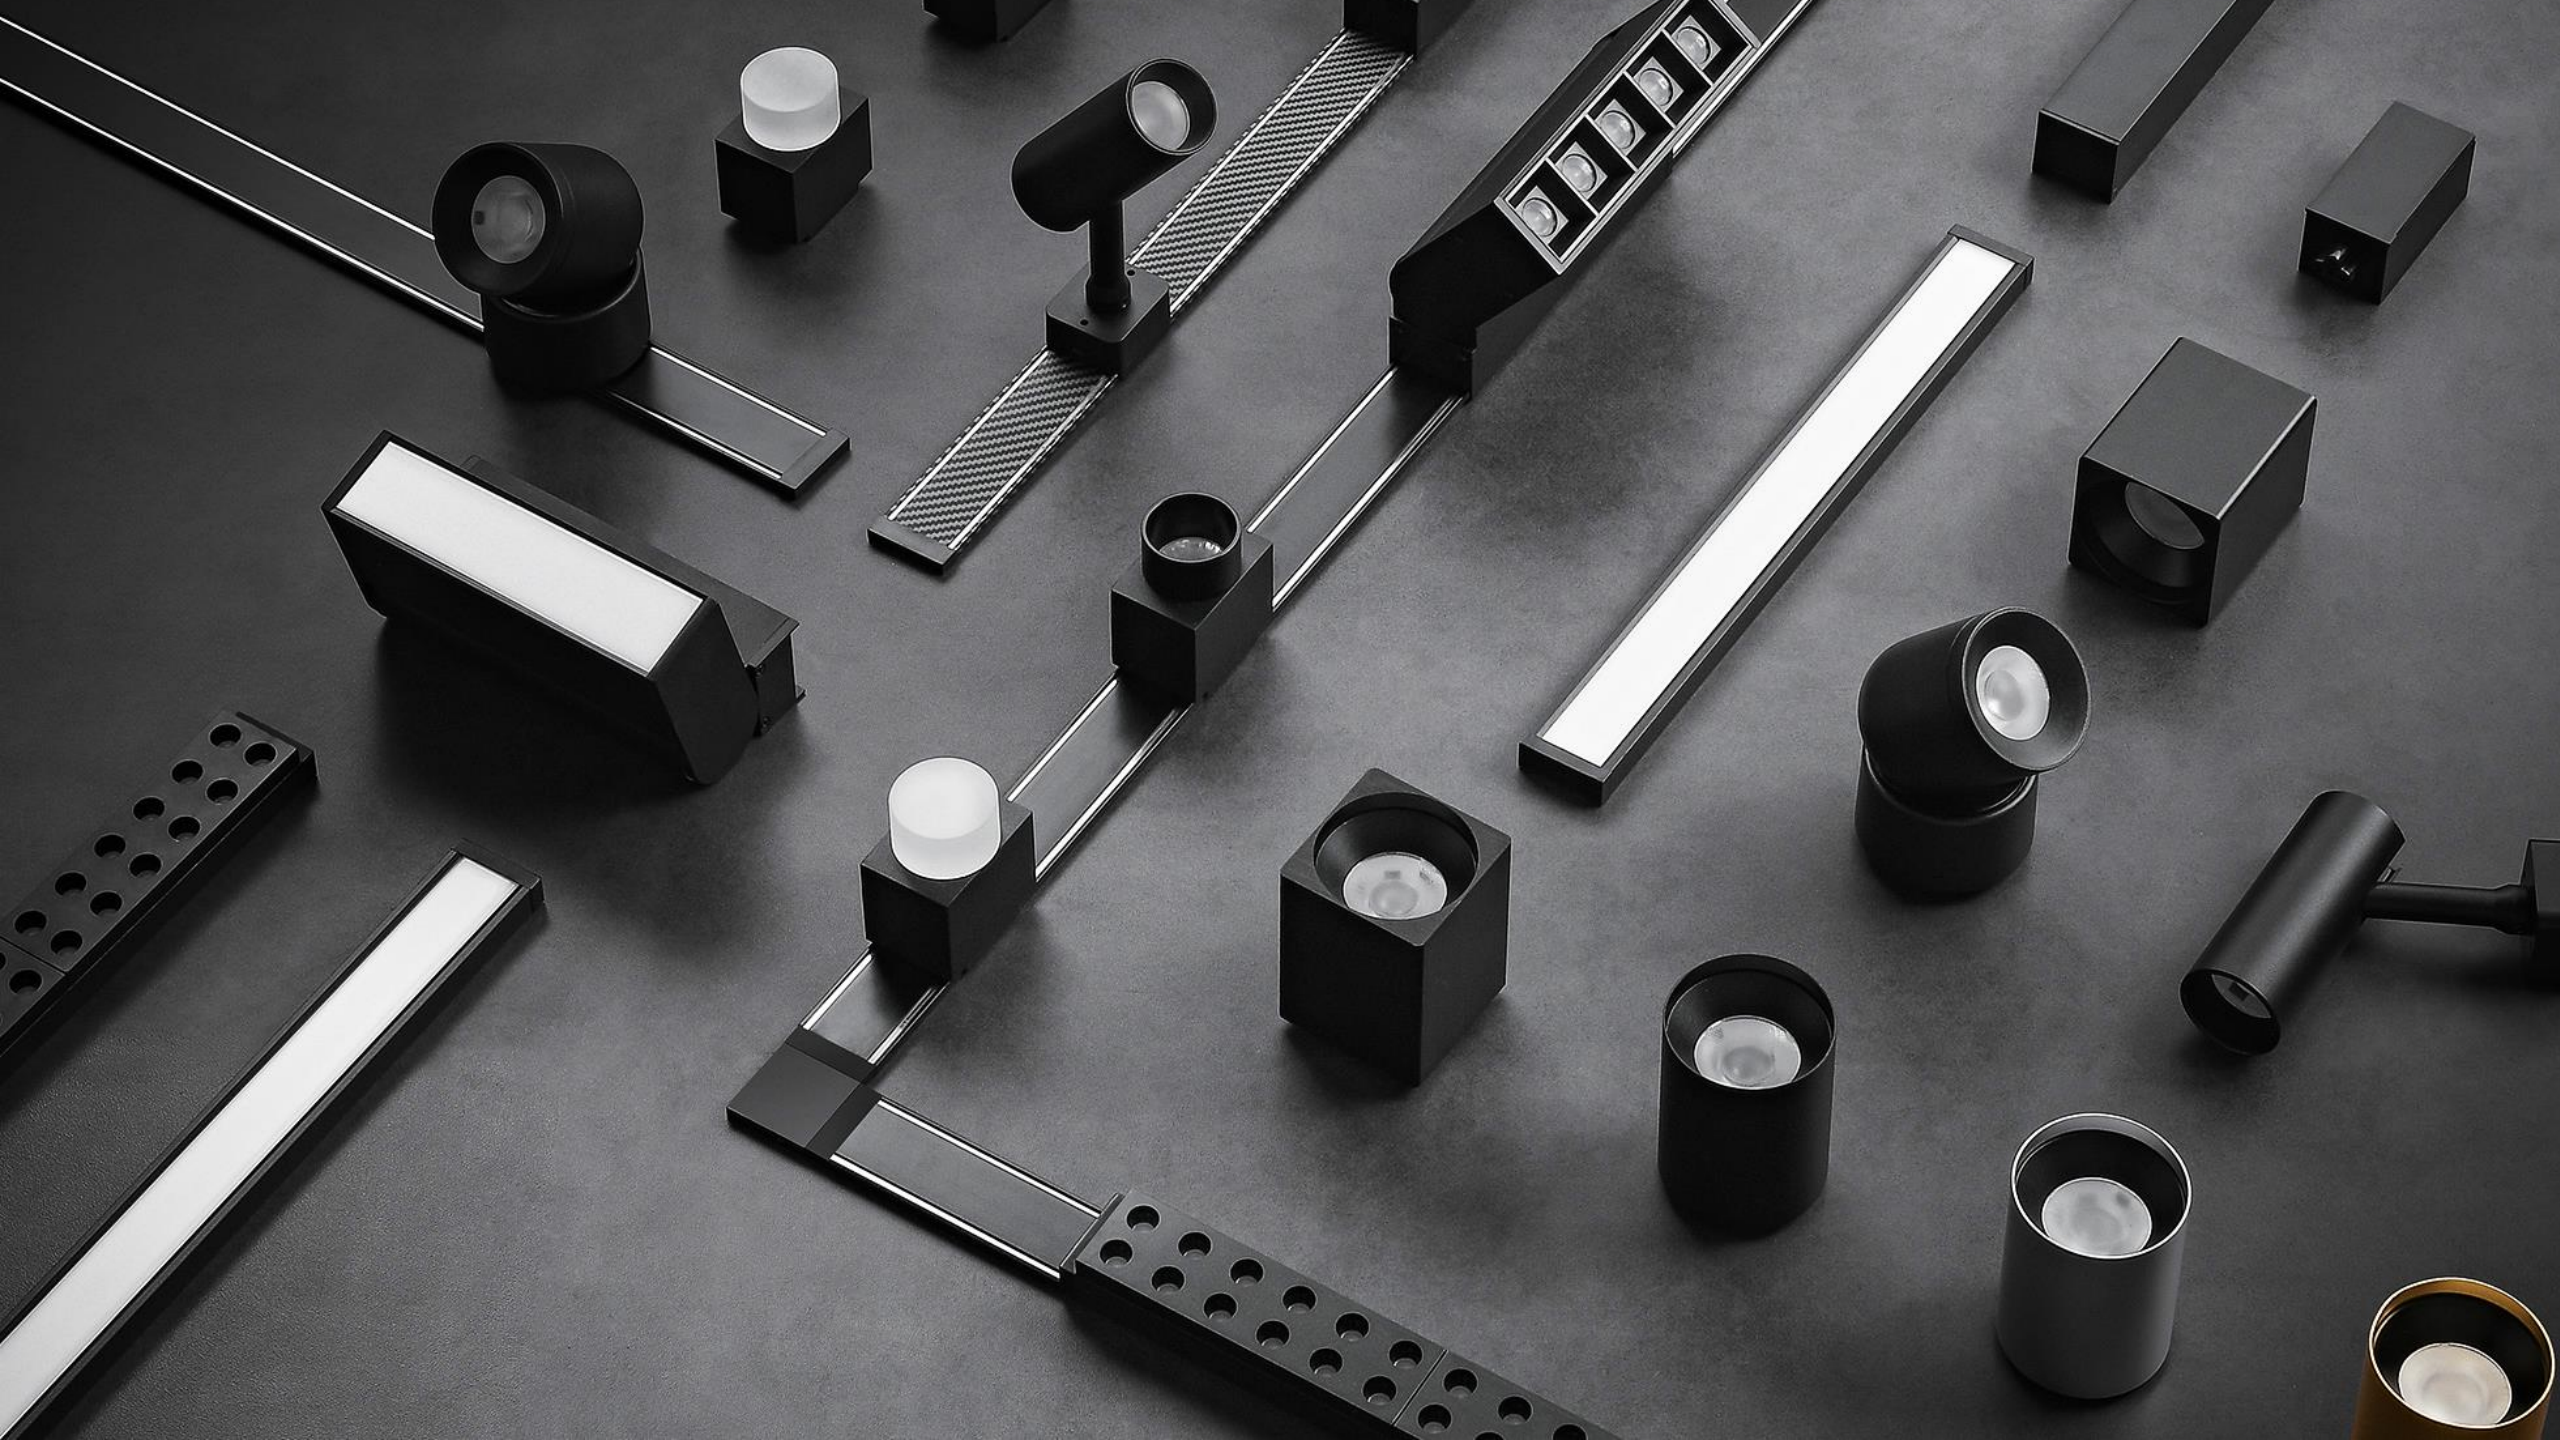


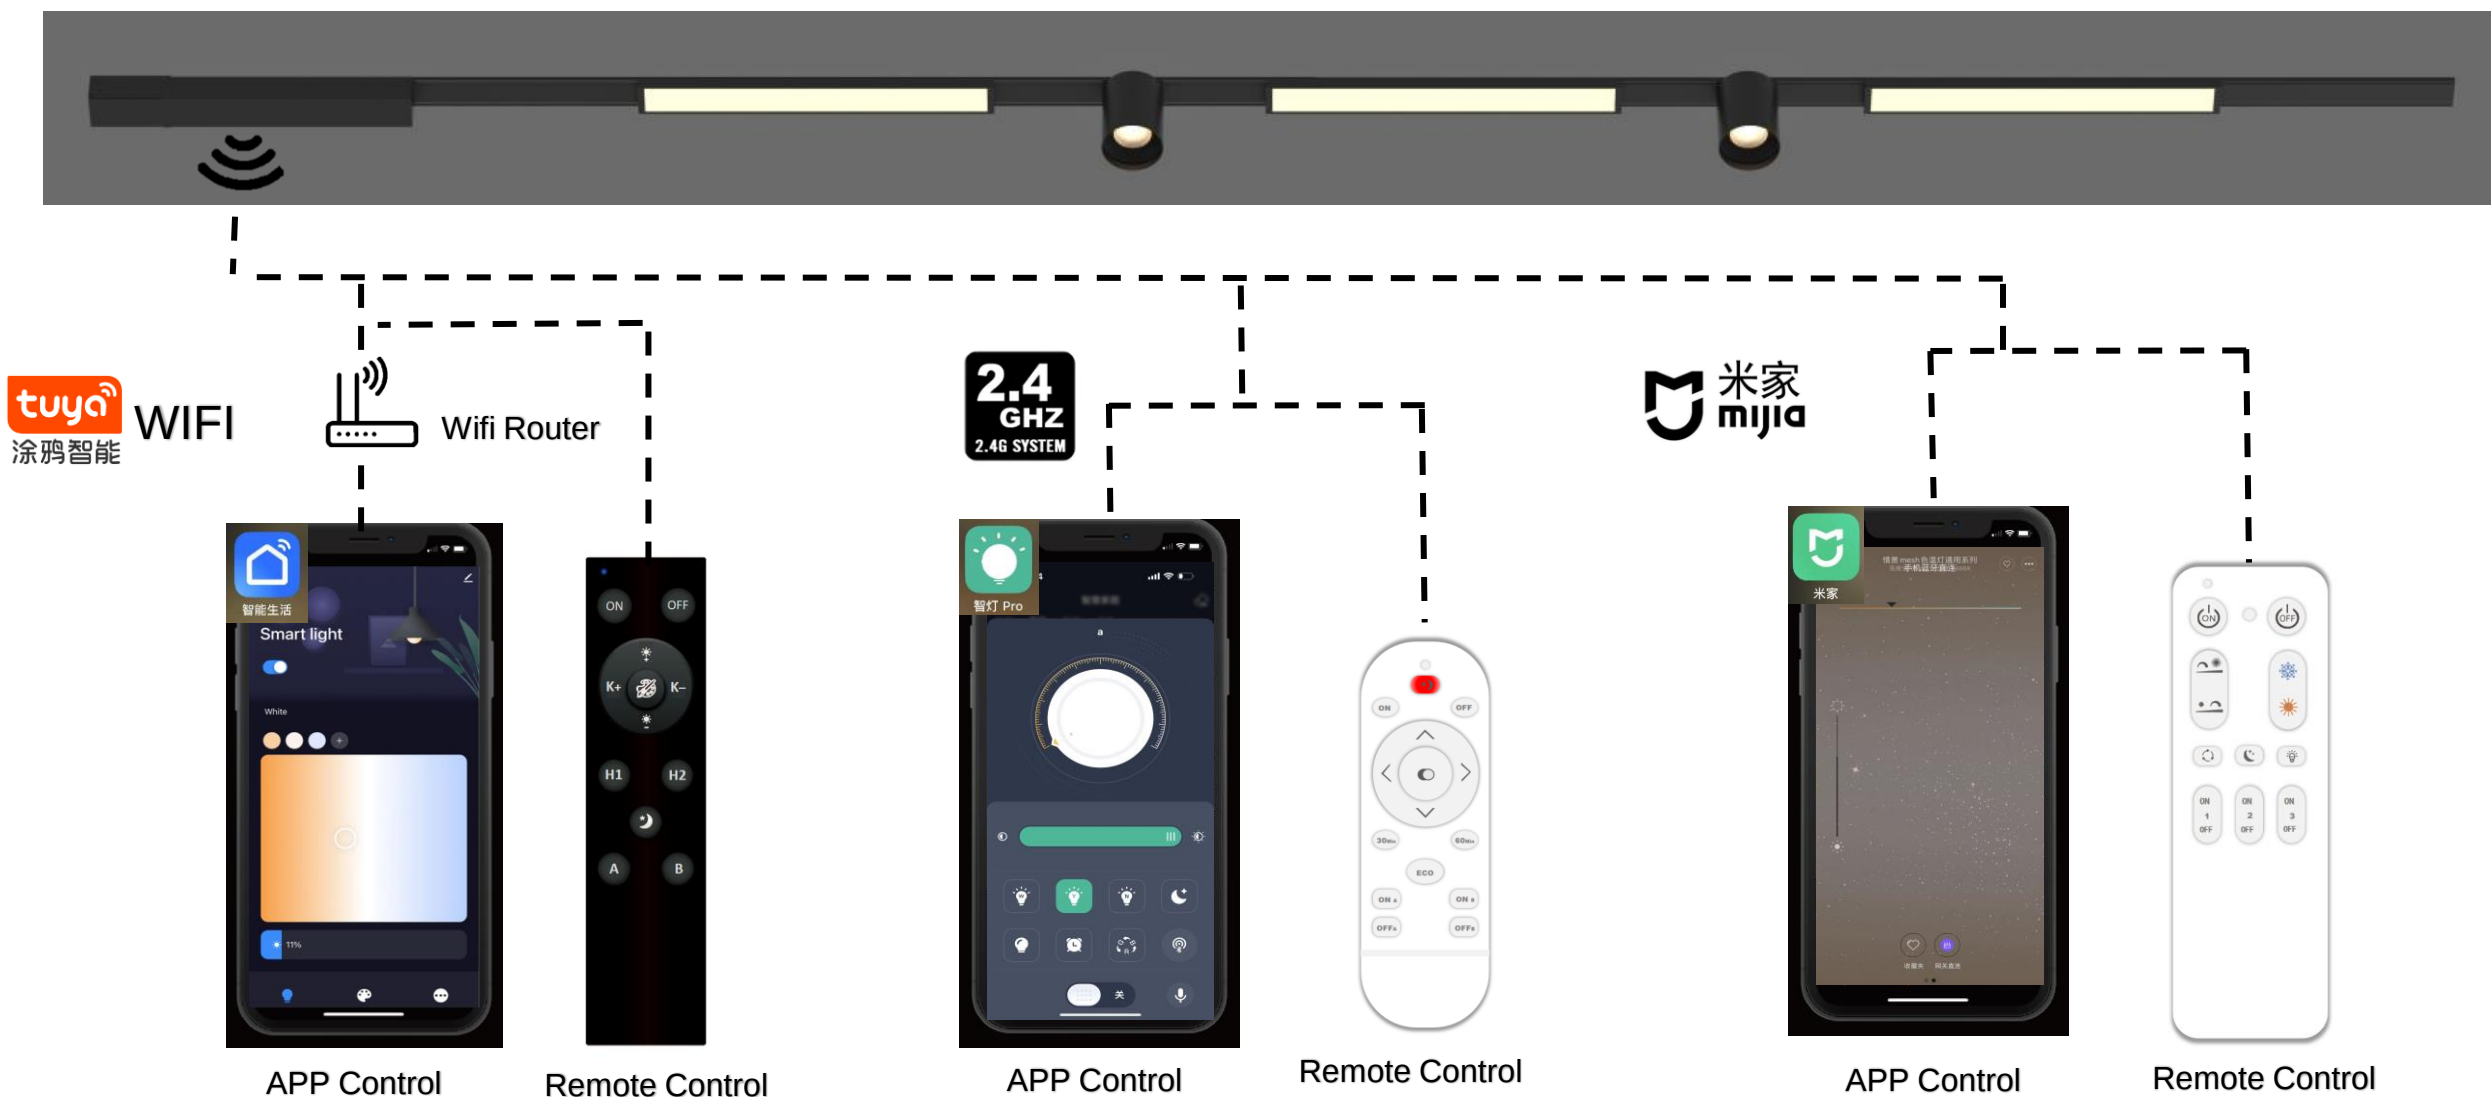

SMART LIGHT SYSTEM

CENTRALIZED CONTROL




Brief Introduction

- Thickness:5mm,apply a magnet system without suspended ceiling
- Can be cut at any length,satisfy various design;
- Easy installation,bracket and body lock model;
- PC body with smoothly move,good insulation;



- ① fix the bracket with screws on ceiling ② Push and fix the body on the bracket ③ Insure the body is fixed properly

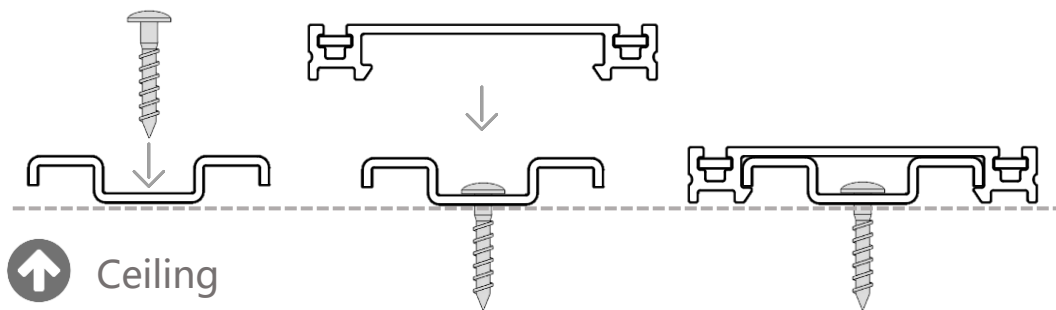


ULTRATHIN MAGNETIC TRACK

- Item No.: MS30
- Color: White Black
- Input Voltage: DC48V
- Material: PC &Iron &Copper
- Dimension: 30*5mm


•Length:

- ① 1000mm
- ② 2000mm
- ③ 3000mm


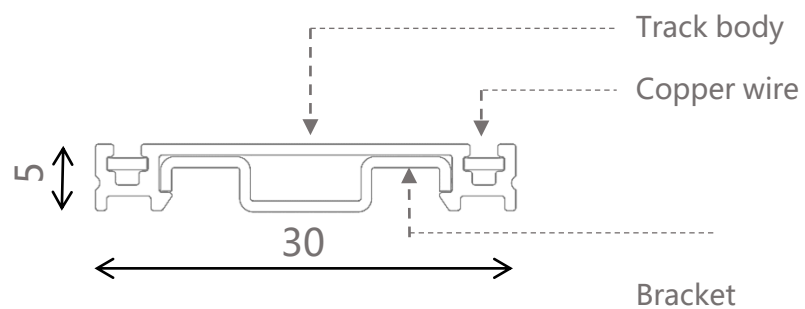


Straight Connect Module

- Model No.: MS Straight Connect Module
- Color: White Black
- Material: PVC&COPPER
- Dimension: 30*30*5mm

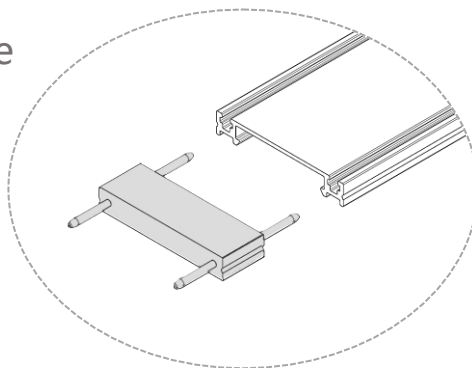


- Insert the copper pin of the module in the track under the copper bar

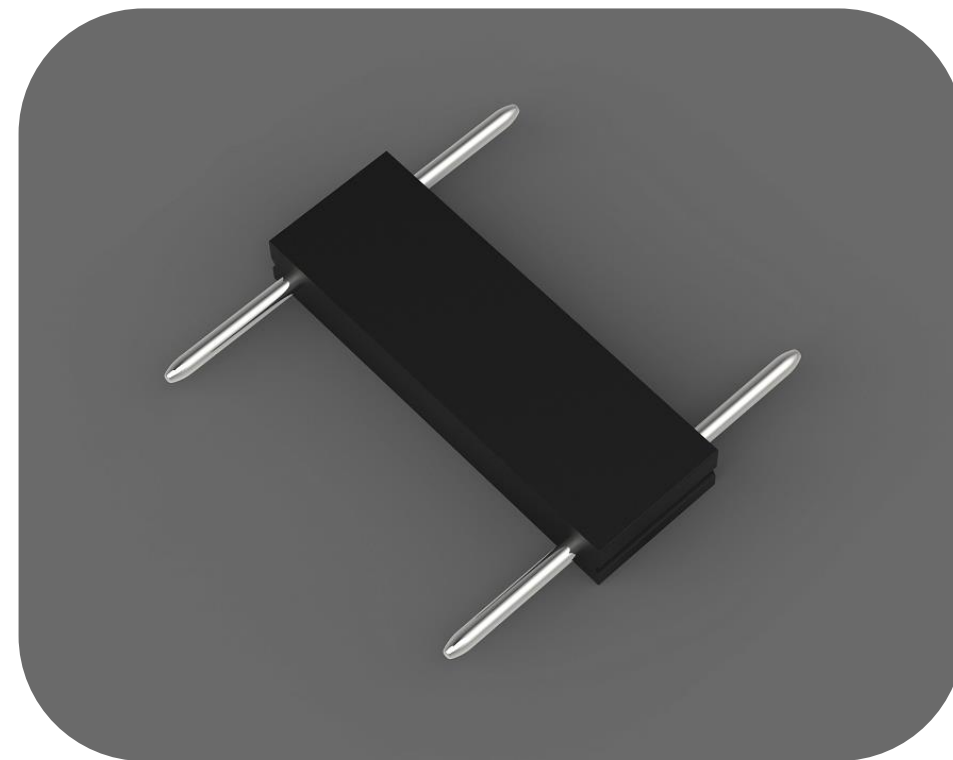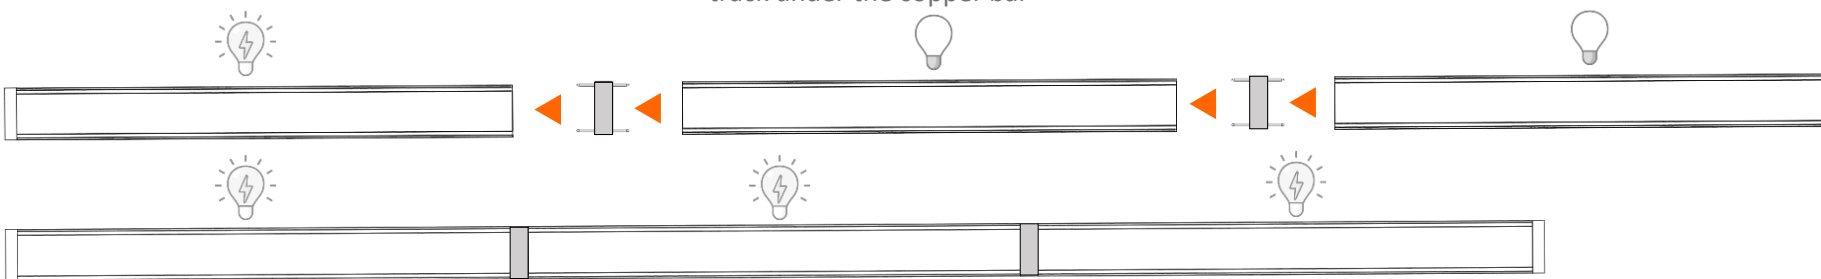


Cross Connect Module



- Model No.: MS Cross Connect Module
- Color: White Black
- Material: PC&COPPER
- Dimension: 30*30*5mm

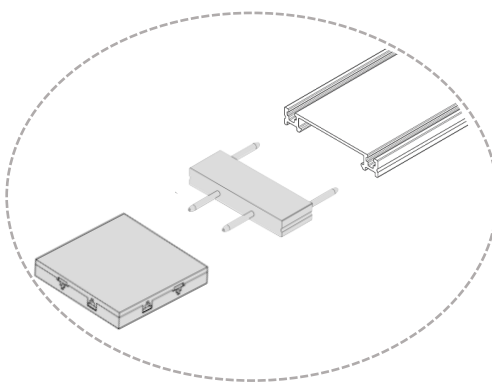


- Insert the copper pin of the module in the track under the copper bar

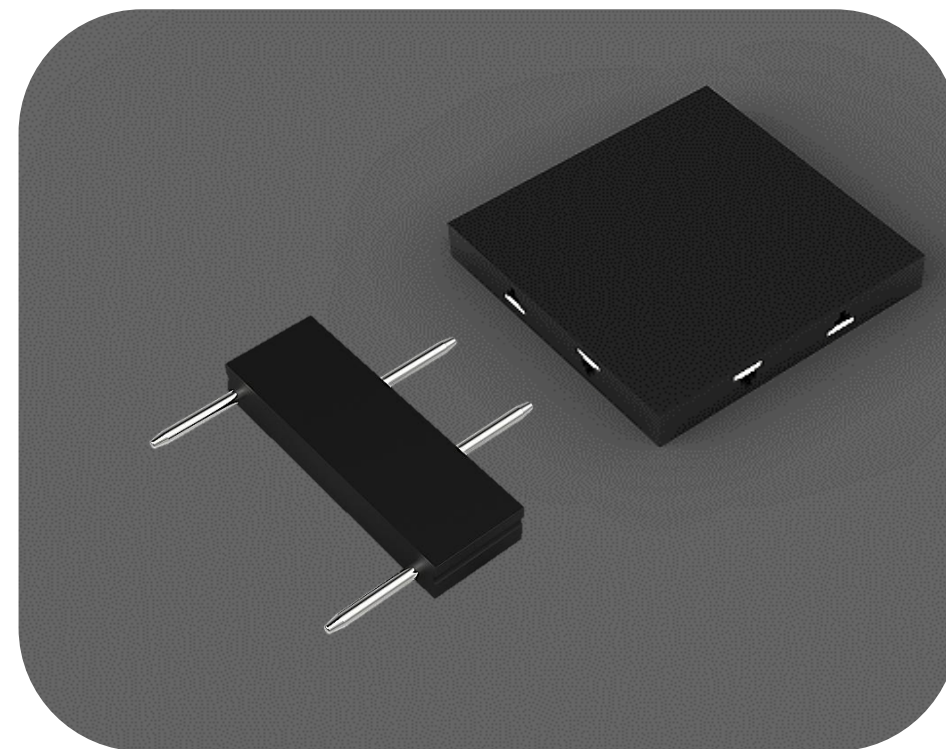



① L Connection



② T Connection


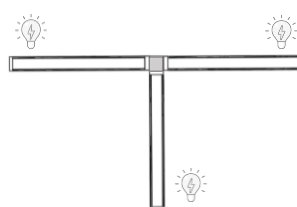


③ Cross Connection

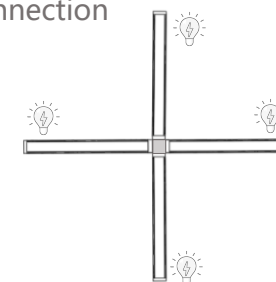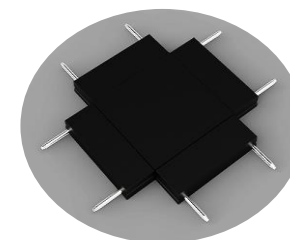

In&Out Connect Module

- Model No.: MS Cross Connect Module
- Color: White Black
- Material: PC&COPPER
- Dimension: 30*25*25mm

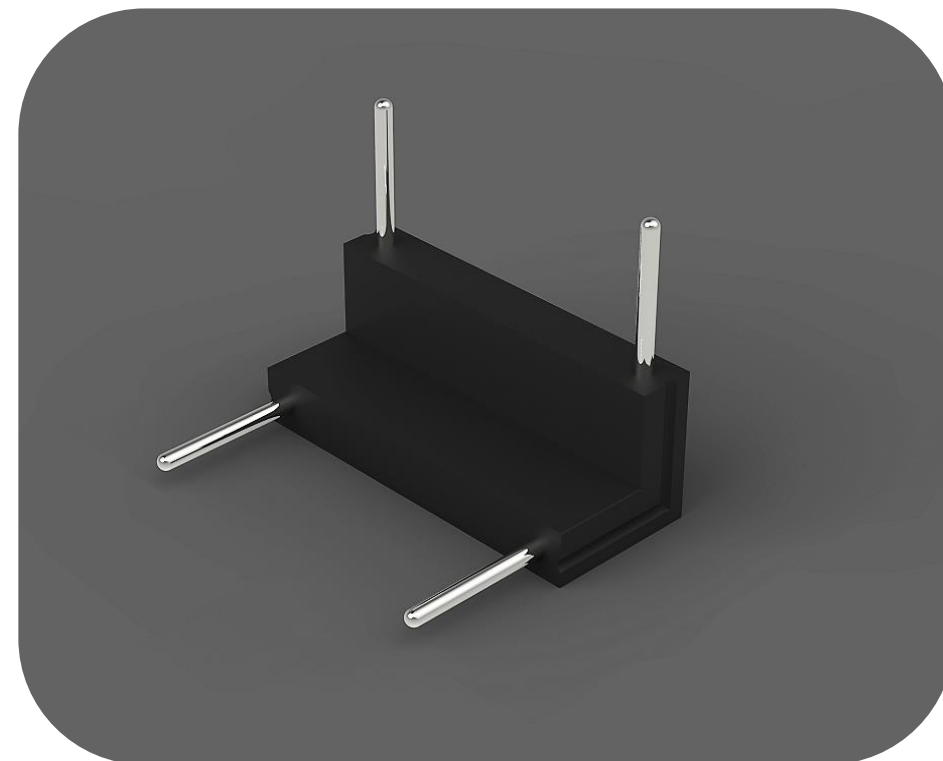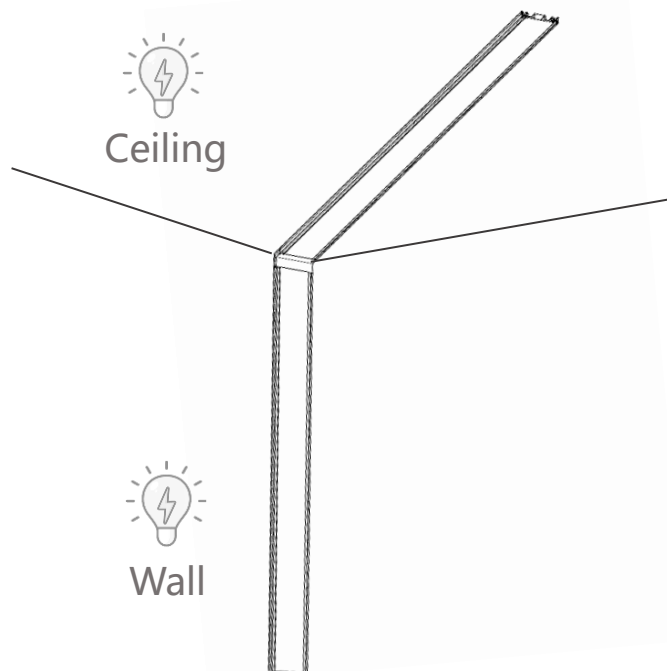



Power Supply 200W&100W

Easy replace


- Model No.: MS30-SP200W MS30-SP100W
- Color: White Black
- Input Voltage: 190-245Vac
- Output Voltage: DC48V
- Output Current: 2.1A 4.2A
- Dimension: 32*31*352mm 32*31*282mm



CEILING

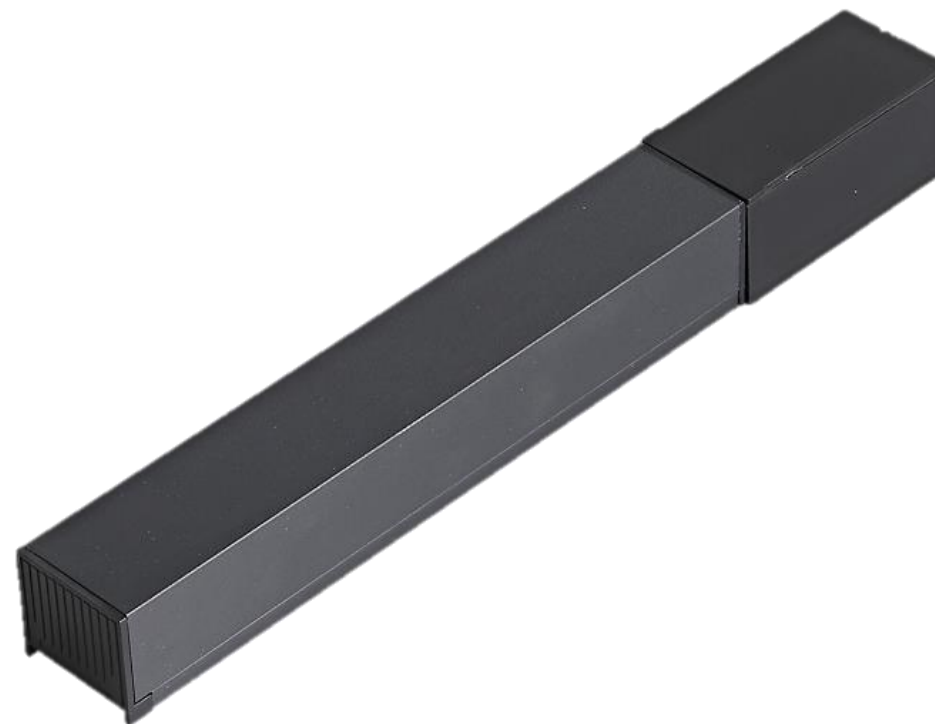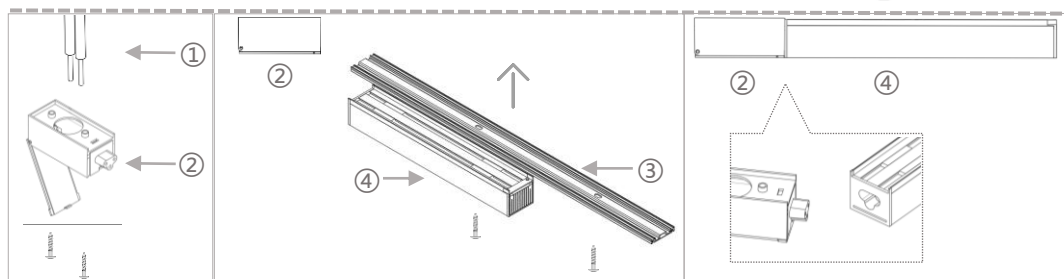



LIGHT MODULES

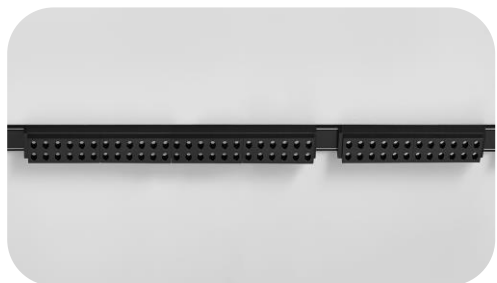

Diffused Model

Basic light


- Model No.: MS30-DF300
- Color: White Black
- Input Voltage: DC48V
- Wattage: 12W
- Beam Angle: 105°
- CCT: 3000K 4000K 5000K
- Ra: >90
- Dimension: 300*32*11mm

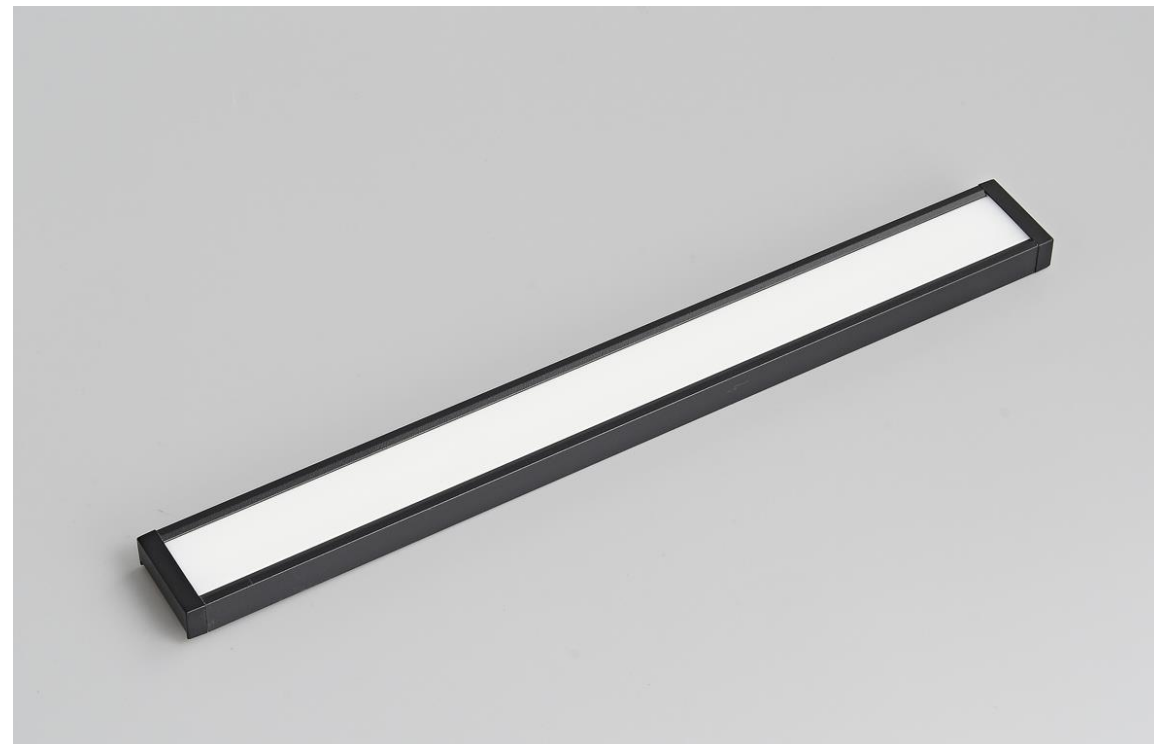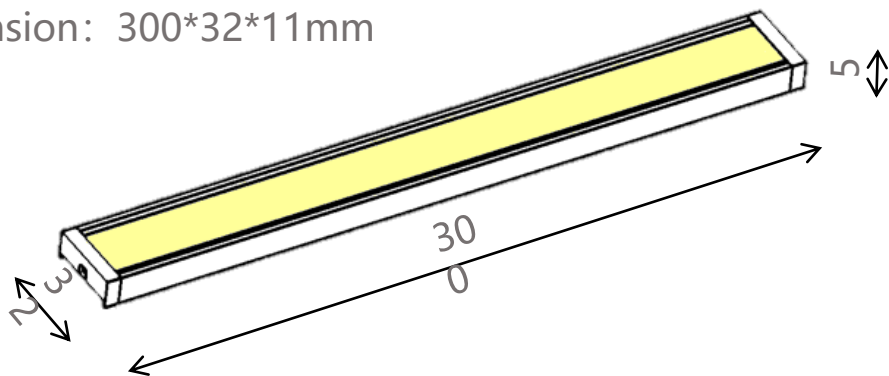

Diffused Model

Basic light


- Model No.: MS30-DF600
- Color: White Black
- Input Voltage: DC48V
- Wattage: 24W
- Beam Angle: 105°
- CCT: 3000K 4000K 5000K
- Ra: >90
- Dimension: 600*32*11mm

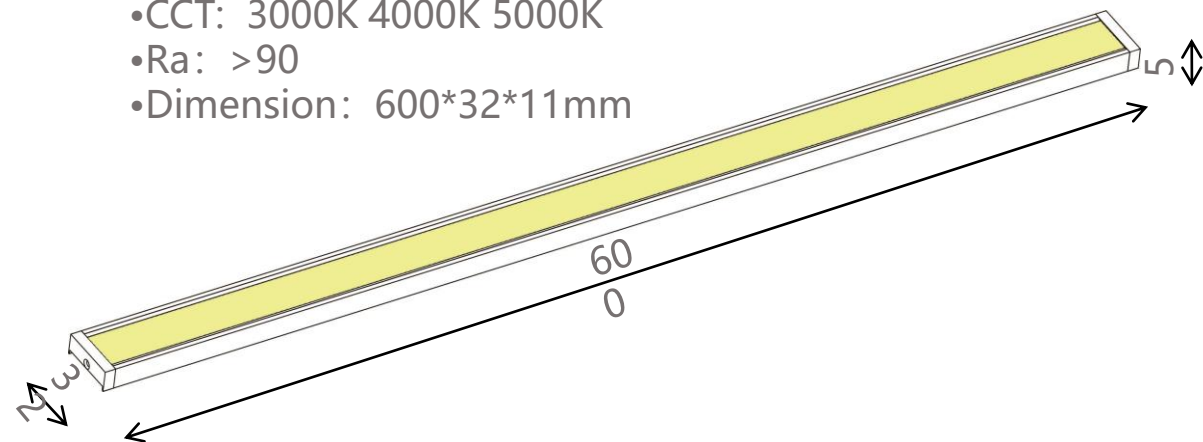

Grille Model

Anti-glare Focus light



- Model No.: MS30-LB24
- Color: White Black
- Input Voltage: 48V
- Wattage: 10W
- Beam Angle: 30°
- CCT: 3000K 4000K 5000K
- Ra: >90
- Dimension: 240*32*20mm

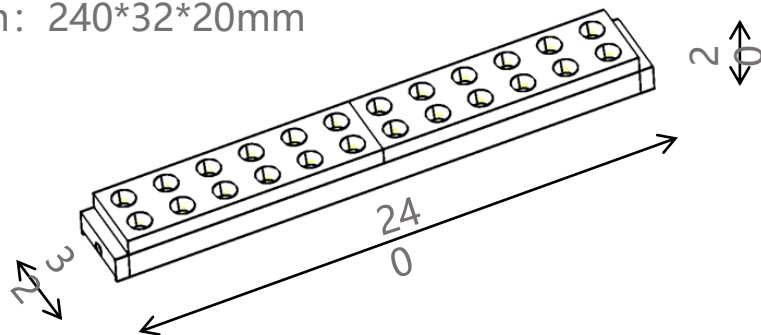

Grille Model

Anti-glare Focus light


- Model No.: MS30-LB48
- Color: White Black
- Input Voltage: 48V
- Wattage: 20W
- Beam Angle: 30°
- CCT: 3000K 4000K 5000K
- Ra: >90
- Dimension: 468*32*20mm

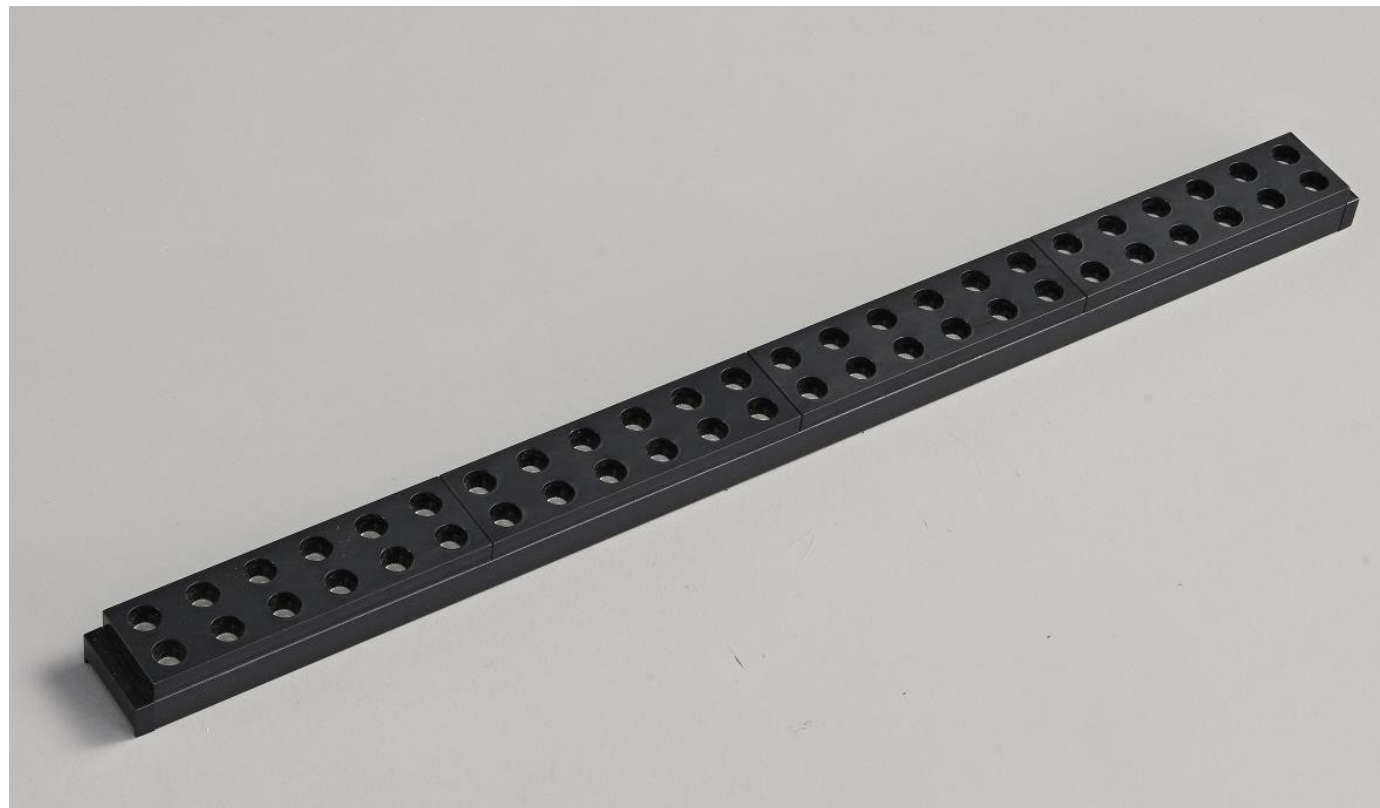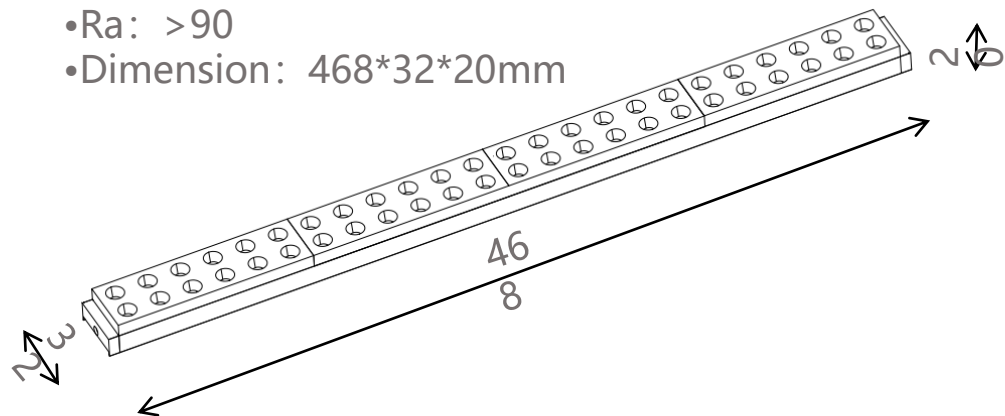

Round Downlight

Anti-glare Focus light


- Model No.: MS30-DR54
- Color: White Black
- Input Voltage: 48V
- Wattage: 8W
- Beam Angle: 24°
- CCT: 3000K 4000K 5000K
- Ra: >90
- Dimension: $\varnothing 54 \times 75\text{mm}$

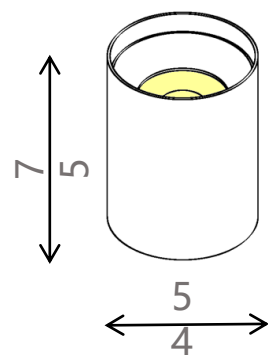

Square Downlight

Anti-glare Focus light


- Model No.: MS30-DS54
- Color: White Black
- Input Voltage: 48V
- Wattage: 8W
- Beam Angle: 24°
- CCT: 3000K 4000K 5000K
- Ra: >90
- Dimension: 55*55*75mm

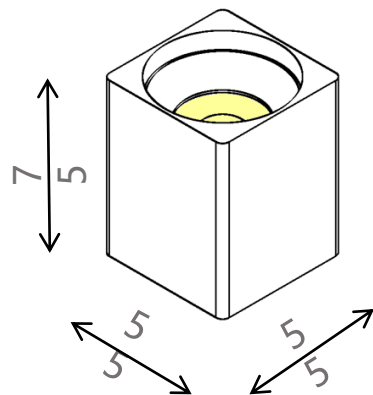

Folded Grille light

Anti-glare Focus light


- Model No.: MS30-FD5
- Color: White Black
- Input Voltage: 48V
- Wattage: 10W
- Beam Angle: 30°
- CCT: 3000K 4000K 5000K
- Ra: >90
- Dimension: 140*35*105mm

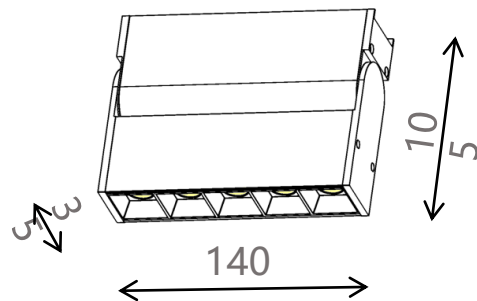

Folded Grille light

Anti-glare Focus light


- Model No.: MS30-FD10
- Color: White Black
- Input Voltage: 48V
- Wattage: 20W
- Beam Angle: 30°
- CCT: 3000K 4000K 5000K
- Ra: >90
- Dimension: 270*35*105mr

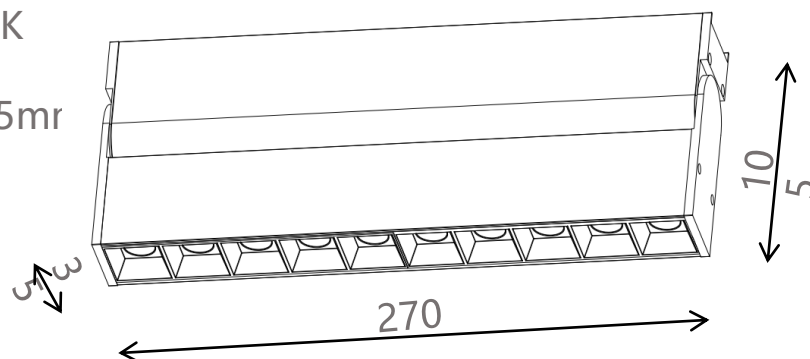

Folded Grille light

Rotable Diffused light


- Model No.: MS30-FD10D
- Color: White Black
- Input Voltage: 48V
- Wattage: 12W
- Beam Angle: 105°
- CCT: 3000K 4000K 5000K
- Ra: >90
- Dimension: 270*30*105mm

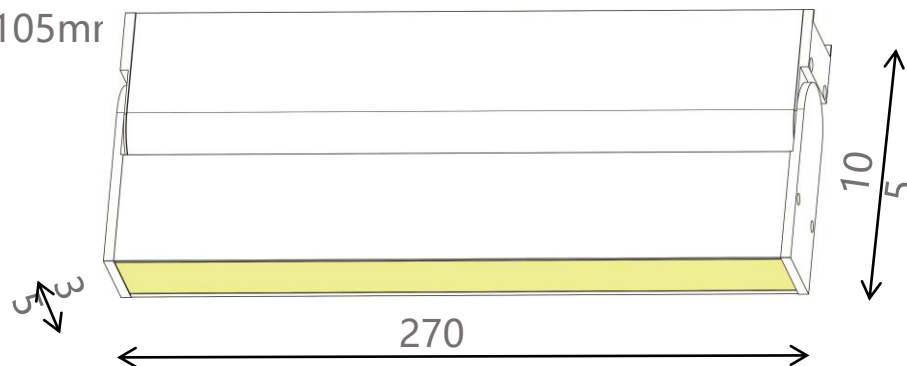


Track light

Anti-glare Focus light

- Model No.: MS30-TL7
- Color: White Black
- Input Voltage: 48V
- Wattage: 7W
- Beam Angle: 24°
- CCT: 3000K 4000K 5000K
- Ra: >90
- Dimension: $\varnothing 36 \times 90 \times 145$ mm

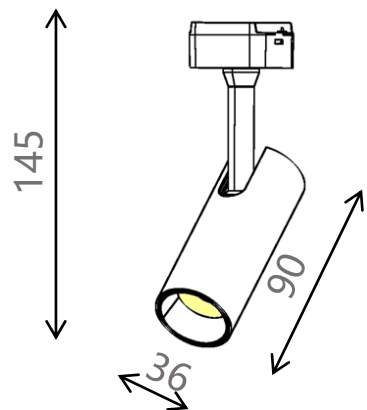


- Model No.: MS30-TL12
- Color: White Black
- Input Voltage: 48V
- Wattage: 12W
- Beam Angle: 24°
- CCT: 3000K 4000K 5000K
- Ra: >90
- Dimension: $\varnothing 48 \times 150 \times 205$ mm

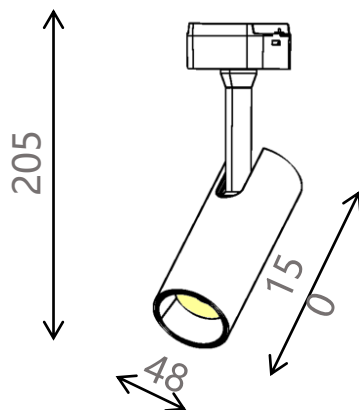

Track light-Focus Ajustable

Anti-glare Focus light


- Model No.: MS30-TL7/FA
- Color: White Black
- Input Voltage: 48V
- Wattage: 7W
- Beam Angle: 10-60°
- CCT: 3000K 4000K 5000K
- Ra: >90
- Dimension: $\varnothing 43 \times 125 \times 185 \text{mm}$

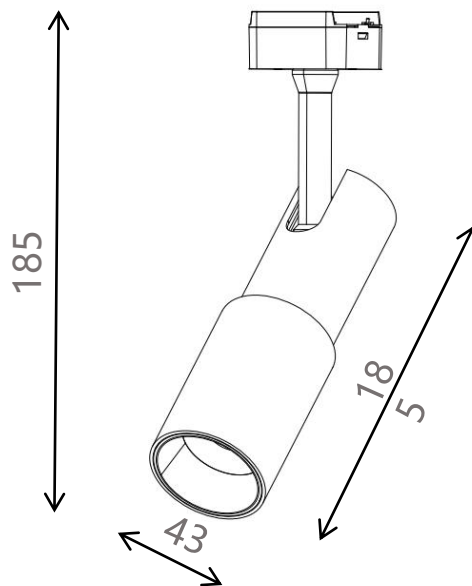

Track light-Shell


Anti-glare Focus light

- Model No.: MS30-TS7
- Color: White Black
- Input Voltage: 48V
- Wattage: 7W
- Beam Angle: 24°
- CCT: 3000K 4000K 5000K
- Ra: >90
- Dimension: $\varnothing 105 \times 120\text{mm}$

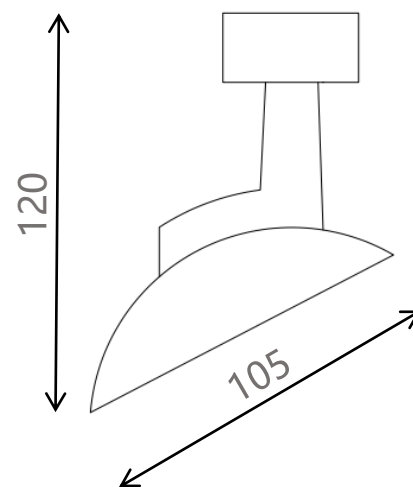


Track light-Pearl

- Model No.: MS30-TP7
- Color: White Black
- Input Voltage: 48V
- Wattage: 7W
- Beam Angle: 270°
- CCT: 3000K 4000K 5000K
- Ra: >90
- Dimension: $\varnothing 120 \times 180 \text{mm}$

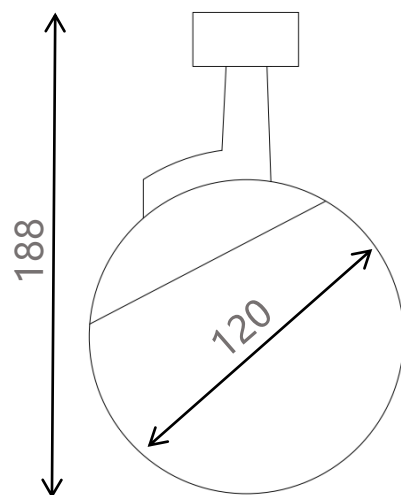

Track light-Moon Stone


- Model No.: MS30-TM7
- Color: White Black
- Input Voltage: 48V
- Wattage: 7W
- Beam Angle: 100°
- CCT: 3000K 4000K
- Ra: >90
- Dimension: $\varnothing 85 \times 50 \times 120 \text{mm}$

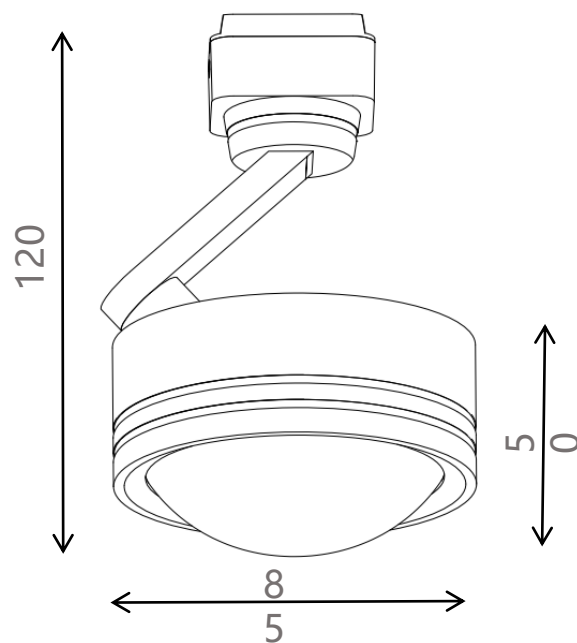

Track light-Moon Stone/L

Anti-glare Focus light


- Model No.: MS30-TML7
- Color: White Black
- Input Voltage: 48V
- Wattage: 7W
- Beam Angle: 24°
- CCT: 3000K 4000K 5000K
- Ra: >90
- Dimension: $\varnothing 85 \times 35 \times 105 \text{mm}$

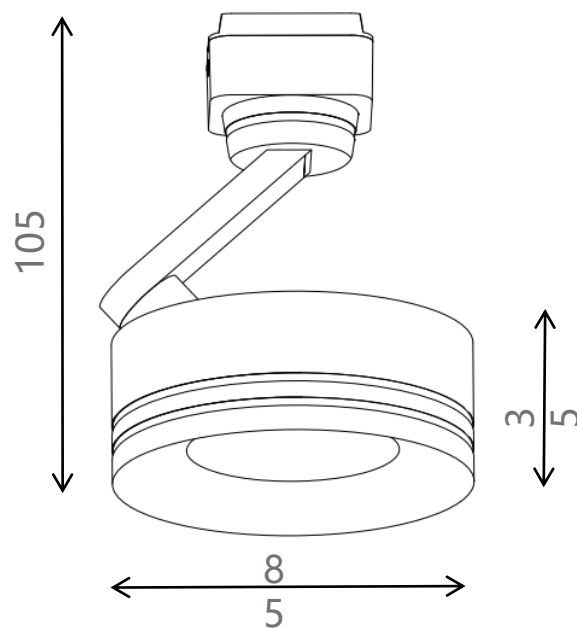

Rotatable Round Spotlight

Anti-glare Focus light


- Model No.: MS30-DR54R
- Color: White Black
- Input Voltage: 48V
- Wattage: 7W
- Beam Angle: 24°
- CCT: 3000K 4000K 5000K
- Ra: >90
- Dimension: $\varnothing 54 \times 63 \times 98\text{mm}$

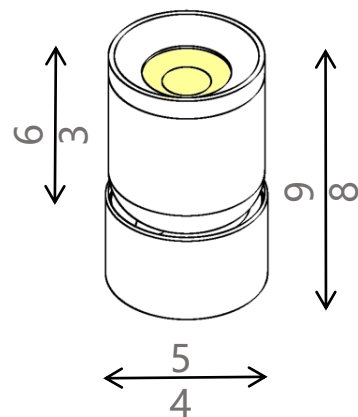

Elfin Spotlight

Anti-glare Focus light


- Model No.: MS30-SP1
- Color: White Black
- Input Voltage: 48V
- Wattage: 6W
- Beam Angle: 30°
- CCT: 3000K 4000K 5000K
- Ra: >90
- Dimension: 48*35*60mm

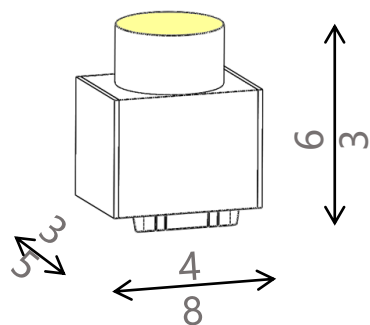

Elfin Arc light


Decorated light

- Model No.: MS30-SA1
- Color: White Black
- Input Voltage: 48V
- Wattage: 4W
- Beam Angle: 160°
- CCT: 3000K 4000K 5000K
- Ra: >90
- Dimension: 48*35*60mm

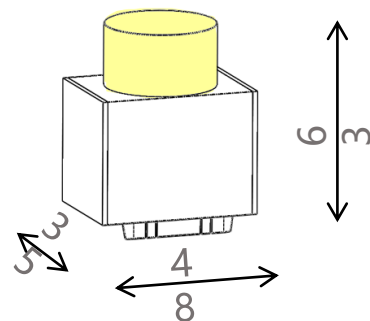


FLEXIBLE TUBE MODULE

- Model No.: MS30-FT500 : MS30-FT1000 : MS30-FT1500
- Color: White Black
- Input Voltage: 48V
- Wattage: ① 8W ② 16W ③ 24W
- Beam Angle: 360°
- CCT: 3000K 4000K 6000K
- Ra: >80
- Dimension: ① $\varnothing$ 22*500mm
② $\varnothing$ 22*1000mm
③ $\varnothing$ 22*1500mm




HANGING LIGHT MODULE

- Model No.: MS30-HS7W
- Color: White Black
- Input Voltage: 48V
- Wattage: 7W
- Beam Angle: 160°
- CCT: 3000K 4000K 5000K
- Ra: >90
- Dimension: $\varnothing 62 \times 90\text{mm}$

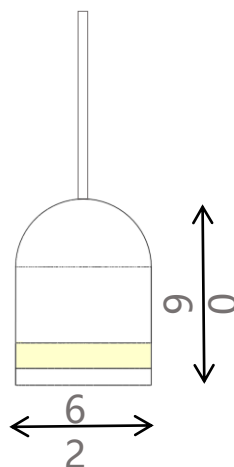


HANGING LIGHT MODULE

- Model No.: MS30-HC7W
- Color: White Black
- Input Voltage: 48V
- Wattage: 7W
- Beam Angle: 160°
- CCT: 3000K 4000K 5000K
- Ra: >90
- Dimension: $\varnothing 72 \times 110 \text{mm}$

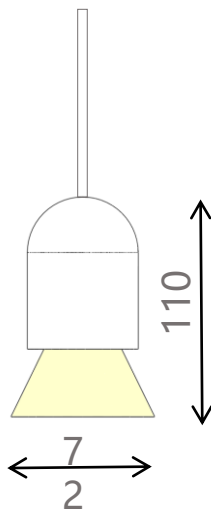


HANGING LIGHT MODULE

- Model No.: MS30-HZ7W
- Color: White Black
- Input Voltage: 48V
- Wattage: 7W
- Beam Angle: 24°
- CCT: 3000K 4000K 5000K
- Ra: >90
- Dimension: $\varnothing 90 \times 78\text{mm}$

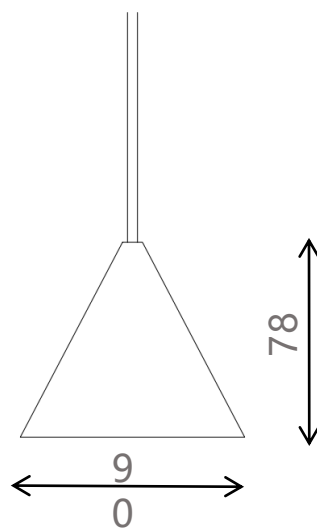


HANGING LIGHT MODULE

- Model No.: MS30-HR7W
- Color: White Black
- Input Voltage: 48V
- Wattage: 7W
- Beam Angle: 270°
- CCT: 3000K 4000K 5000K
- Ra: >90
- Dimension: $\varnothing 120 \times 166 \text{mm}$

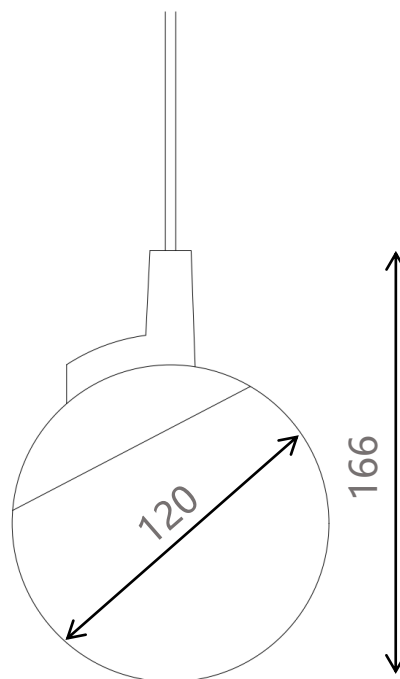

HANGING LIGHT MODULE

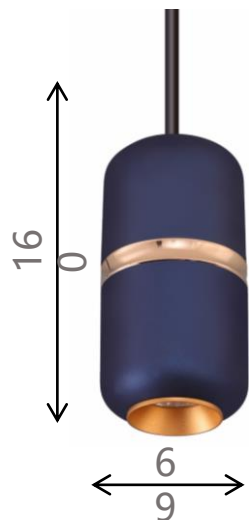

- Model No.: MS30-PD006
- Input Voltage: 48V
- Wattage: 7W
- Beam Angle: 30°
- CCT: 3000K 4000K 5000K
- Ra: >90
- Dimension: $\varnothing 69 \times 160 \text{mm}$




- Model No.: MS30-PD007
- Input Voltage: 48V
- Wattage: 7W
- Beam Angle: 30°
- CCT: 3000K 4000K 5000K
- Ra: >90
- Dimension: $\varnothing 82 \times 80 \text{mm}$



- Model No.: MS30-PD008
- Input Voltage: 48V
- Wattage: 7W
- Beam Angle: 160°
- CCT: 3000K 4000K 5000K
- Ra: >90
- Dimension: $\varnothing 90 \times 75 \text{mm}$



- Model No.: MS30-PD009
- Input Voltage: 48V
- Wattage: 7W
- Beam Angle: 270°
- CCT: 3000K 4000K 5000K
- Ra: >90
- Dimension: $\varnothing 95 \times 120 \text{mm}$

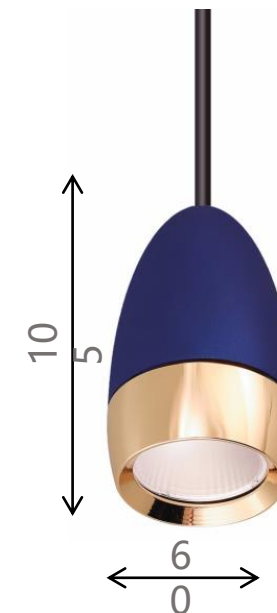

- Model No.: MS30-PD010
- Input Voltage: 48V
- Wattage: 7W
- Beam Angle: 30°
- CCT: 3000K 4000K 5000K
- Ra: >90
- Dimension: $\varnothing 60 \times 105 \text{mm}$